


PQ Cores

AL-Value(nH/N²±25%): 1 kHz, 0.25v, 100Ts, 25±3⁰C

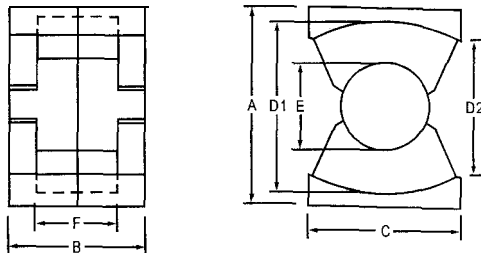

尺寸 (DIMENSIONS)

規格 (Type)	尺寸 (Dimensions)							(unit: mm)
	A	B	C	D1	D2	E	F	
PQ20/16	20.50±0.40	16.20±0.20	14.00±0.40	17.60min	12.00min	8.80±0.20	10.30±0.30	
PQ20/20	20.50±0.40	20.20±0.20	14.00±0.40	17.60min	12.00min	8.80±0.20	14.30±0.30	
PQ26/20	26.50±0.45	20.15±0.25	19.00±0.45	22.05min	15.50min	12.00±0.20	11.50±0.30	
PQ26/25	26.50±0.45	24.75±0.25	19.00±0.45	22.05min	15.50min	12.00±0.20	16.10±0.30	
PQ32/20	32.00±0.50	20.55±0.25	22.00±0.50	27.00min	19.00min	13.45±0.25	11.50±0.30	
PQ32/30	32.00±0.50	30.35±0.25	22.00±0.50	27.00min	19.00min	13.45±0.25	21.30±0.30	
PQ35/35	35.10±0.60	34.75±0.25	26.00±0.50	31.50min	23.50min	14.35±0.25	25.00±0.30	
PQ40/40	45.50±0.90	39.75±0.25	28.00±0.60	36.75min	28.00min	14.90±0.30	29.50±0.30	
PQ50/50	50.00±0.70	49.95±0.25	32.00±0.60	43.30min	31.50min	20.00±0.35	36.10±0.30	

磁芯參數及性能 (CORE SET PARAMETERS AND ELECTRICAL CHARACTERISTICS)

規格 (Type)	Le (mm)	Ae (mm ²)	Cl (mm ⁻¹)	Ve (mm ³)	材 料 Material				
					JPP-3	JPP-4	JPH-5	JPH-7	JPH-10
					AL	AL	AL	AL	AL
PQ20/16	37.4	62.0	0.6	2318.8	3650	3350			
PQ20/20	45.4	62.0	0.7	2814.8	3120	2990			
PQ26/20	46.3	119.0	0.4	5509.7	5730	5250			
PQ26/25	55.5	118.0	0.5	6549	4680	4300			
PQ32/20	55.5	170.0	0.3	9435	6980	6400			
PQ32/30	74.6	161.0	0.5	12010	4950	4550			
PQ35/35	87.9	196.0	0.4	17228	4680	4300			
PQ40/40	101.9	201.0	0.5	20481	4480	4100			
PQ50/50	113.0	328.0	0.3	37064	6660	6150			