

# Bell Shape

## Fabric Shielding Gaskets

**Shielding Effectiveness**  
80 - 115dB

**Frequency Range**  
20Mhz - 1GHz

**Low Compression**  
See page 18 for typical performance

**Dura-Layer Construction**  
Resilient base with high-performance fabric

**Recommended Compression**  
30-50% of gasket height

### BELL SHAPE

with pressure sensitive adhesive mounting.

Available in standard 24" and 48" lengths or cut to length as desired.



Conductive tape and products without tape can also be supplied. Contact factory for ordering information.

Please consult factory for sizes not shown.

See below for part number explanation.

See technical data sheet for typical cross section and length tolerances.

Part	H (in)	(mm)	W (in)	(mm)
<b>SG070180B</b>	0.070	1.78	0.180	4.57
<b>SG090315B</b>	0.090	2.29	0.315	8.00
<b>SG100300B</b>	0.100	2.54	0.300	7.62
<b>SG130256B</b>	0.130	3.30	0.256	6.50
<b>SG157500B</b>	0.157	3.99	0.500	12.70
<b>SG200500B</b>	0.200	5.08	0.500	12.70

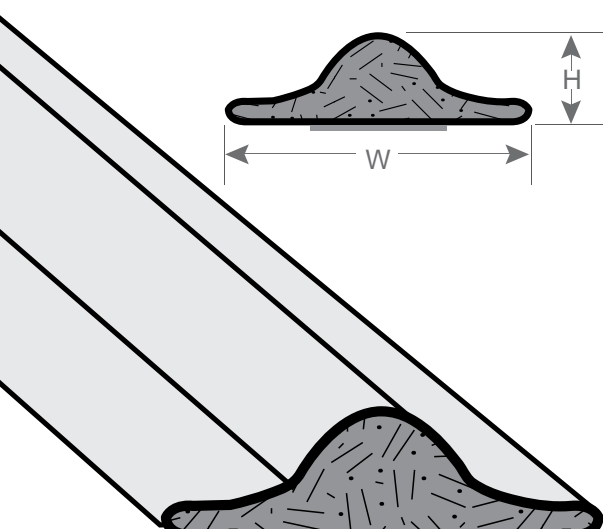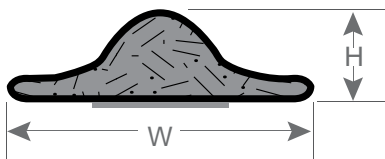

#### Part Number Explanation

SG    XXX    XXX    X    -    XX.XX  
 ↓    ↓    ↓    ↓    ↓  
 # start    Height    Width    Profile    Length

\*Example:  
SG100300B-22.50: Gasket .100 tall, .300 wide, Bell shape and 22.5" long